

433 MHz ASK wide band - FR4 substrate

LOW COST RECEIVER

AC-RX2/CS

P.N. 650201133G

DESCRIZIONE

Versione su circuito stampato (FR4) del più conosciuto ricevitore AC-RX2 su allumina. Pin-out standard AUREL
Ricevitore con condensatore variabile a basso assorbimento, alta immunità ai disturbi di alimentazione e bassa radiazione in antenna.


⁽¹⁾ 100% generatore RF

DESCRIPTION

Printed circuit version of the well established long available, AC-RX2 receiver assembled on alumina substrate.
Same AUREL standard pin-out.
Trimmable capacitor, low current, low antenna radiation and high insensitivity to power switching noises.

⁽¹⁾ RF generator with 100% modulation

BLOCK DIAGRAM

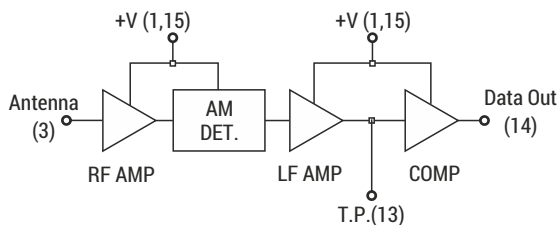


TECHNICAL SPECIFICATION

Ta = 25 °C


CARATTERISTICHE / CHARACTERISTICS	MIN	TYP	MAX	UNIT
Supply Voltage • Alimentazione	4.5	5	5.5	Vdc
Supply Current • Corrente Assorbita		2.5	3	mA
Reception frequency • Frequenza di ricezione		433.92		MHz
RF sensitivity • Sensibilità RF		-106 ⁽¹⁾		dBm
- 3dB RF Bandwidth • Banda passante RF a - 3dB		±2		MHz
Square wave output • Onda quadra in uscita			3	KHz
Spectrum emitted level • Radiazione in antenna		-65	-60	dBm
Output high voltage • Livello alto d'uscita	V _s - 1.2			V
Output low voltage • Livello basso d'uscita			GND + 0.4	V
Switch-on time • Tempo di accensione			2	s
Operating temperature range • Temperatura di lavoro	-20		+80	°C

⁽¹⁾ RF generator with 100% modulation

COMPONENT SIDE

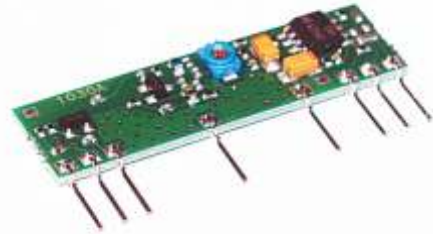

DIMENSIONS

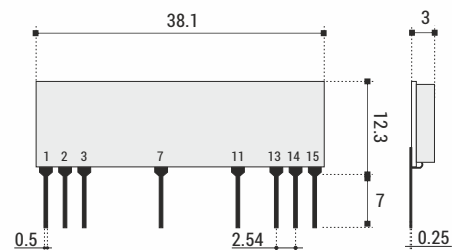

PIN-OUT

- 1) +V
- 2) GROUND
- 3) ANTENNA
- 7) GROUND
- 11) GROUND
- 13) TEST POINT
- 14) DATA OUTPUT
- 15) +V

Information subject to change without notice