


START


1

Resistor - Weerstand - Résistance - Widerstand - Resistencia - Motstand - Vastus - Resistenze




◇ R1 : 470K	(Yellow, Purple, Yellow) - (Geel, Paars, Geel) - (Jaune, Violet, Jaune) - (Gelb, Violet, Gelb) - (Gul, Lila, Gul) - (Keltainen, Purppura, Keltainen) - (Amarillo, Morado, Amarillo) - (Amarelo, Violeta, Amarelo) - (Giallo, Viola, Giallo)
◇ R2 : 3M3	(Orange, Orange, Green) - (Oranje, Oranje, Groen) - (Orange, Orange, Vert) - (Orange, Orange, Grün) - (Orange, Orange, Grön) - (Oranssi, Oranssi, Vihreä) - (Naranjado, Naranjado, Verde) - (Laranja, Laranja, Verde) - (Aranciato, Aranciato, Verde)
◇ R3 : 10K	(Brown, Black, Orange) - (Bruin, Zwart, Oranje) - (Brun, noir, Orange) - (Braun, Schwarz, Orange) - (Brun, Svart, Orange) - (Ruskea, Musta, Oranssi) - (Marrón, Negro, Naranjado) - (Castanho, Preto, Laranja) - (Marrone, Nero, Aranciato)
◇ R4 : 100K	(Brown, Black, Yellow) - (Bruin, zwart, Geel) - (Brun, noir, Jaune) - (Braun, Schwarz, Gelb) - (Brun, Svart, Gul) - (Ruskea, Musta, Keltainen) - (Marrón, Negro, Amarillo) - (Castanho, Preto, Amarelo) - (Marrone, Nero, Giallo)
◇ R5 : 1M	(Brown, Black, Green) - (Bruin, Zwart, Groen) - (Brun, Noir, Vert) - (Braun, Schwarz, Grün) - (Brun, Svart, Grön) - (Ruskea, Musta, Vihreä) - (Marrón, Negro, Verde) - (Castanho, Preto, Verde) - (Marrone, Nero, Verde)
◇ R6 : 220	(Red, Red, Brown) - (Rood, Rood, Bruin) - (Rouge, Rouge, Brun) - (Rot, Rot, Braun) - (Röd, Röd, Brun) - (Punainen, Punainen, Ruskea) - (Rojo, Rojo, Marrón) - (Encarnado, Encarnado, Castanho) - (Rosso, Rosso, Marrone)
◇ R7 : 0	(Black) - (zwart) - (noir) - (Schwarz) - (Svart) - (Musta) - (Negro) - (Preto) - (Nero)

2 DIODE




◇ D1 : 1N4148

3 CAPACITOR C...




◇ C1 : 10nF (103)

4 IC SOCKETS



◇ IC1 : 14P
◇ IC2 : 16P


5 PUSH BUTTON



◇ SW1 : KRS0612

6

LEDs Watch the polarity ! Attention à la polarité !




◇ LED1, LED6 : Yellow / Geel / Jaune / Gelb / Gul / Keltainen / Amarillo / Amarelo / Giallo
◇ LED2, LED4, LED7 & LED9 : Red / Rood / Rouge / Rot / Röd / Punainen / Rojo / Encarnado / Rosso
◇ LED3, LED5, LED8 & LED10 : Green / Groen / Vert / Grün / Grön / Vihreä / Verde



7

ELECTROLYTIC CAPACITORS




Watch the polarity !
Attention à la polarité !

◇ C2 : 1µF
◇ C3 : 47µF

8

IC'S

WATCH THE POSITION OF THE NOTCH !
ATTENTION A LA POSITION DE L'ENCOCHE !

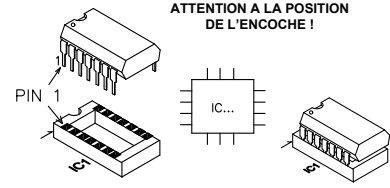


◇ IC1 : 4069
◇ IC2 : 4017



9

BATTERY HOLDER

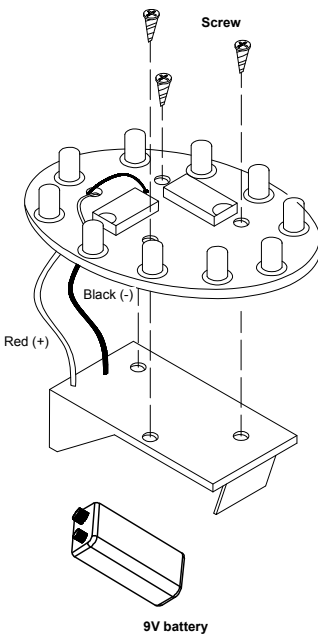

SCHEMATIC DIAGRAM

