
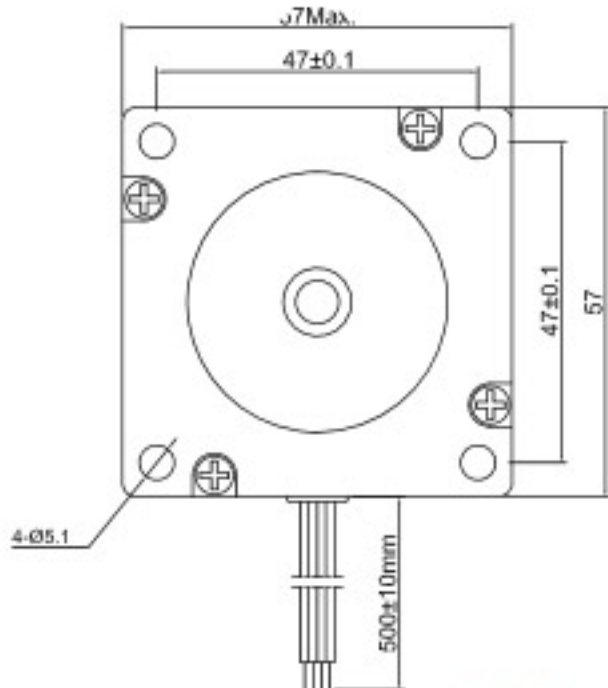



□ 56.8mm (□ 2.24in.)

Step Angle 1.8° 23HS High-Torque Type

■ Dimension Unit = mm(in.)

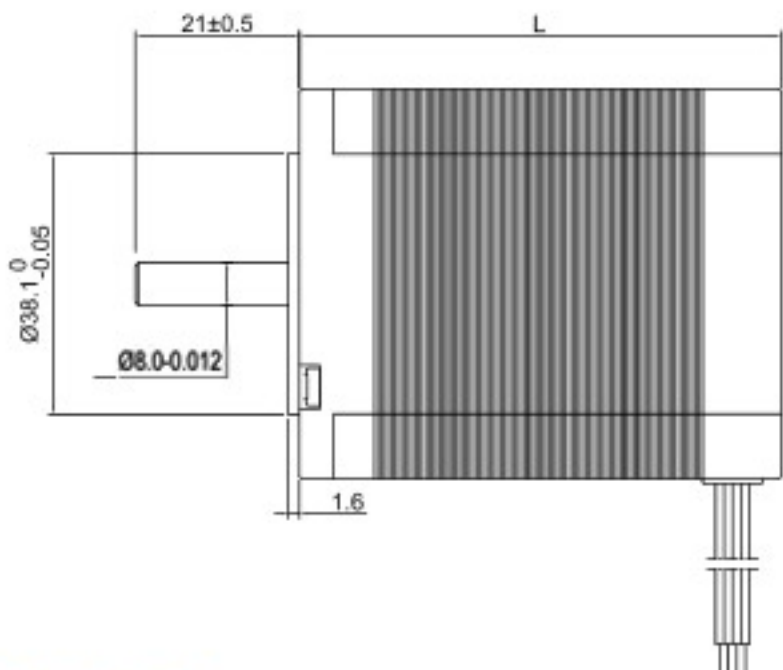

■ Wiring Diagram

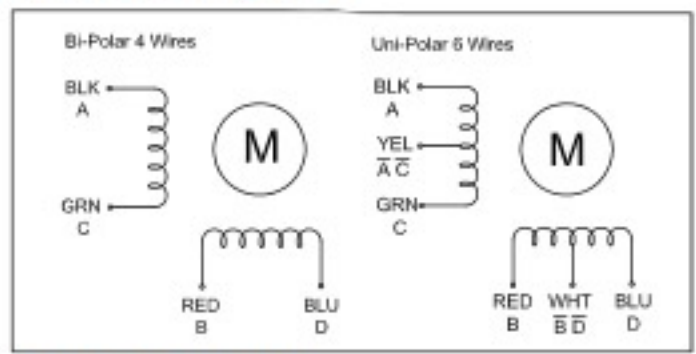

■ Excitation Sequence

Excitation: 2-2					Excitation: 2-1-2				
STEP	A	B	C	D	STEP	A	B	C	D
1	+	+			1	+			
2		+	+		2	+	+		
3			+	+	3		+		
4	+			+	4		+	+	
					5			+	
					6			+	+
					7				+
					8	+			+

■ Specifications

Model	Torque		Voltage	Current	Resistance	Inductance	Inertia	Bi/Unipolar	Weight	Length "L"	
	Ncm	oz.in	V/Phase	A/Phase	Ohm/Phase	mH/Phase	g.cm2	# of Leads	Kg	mm	in
23HS41-1804S	240	339.9	4.95	1.8	2.75	17	680	Bi (4)	1.25	104	4.1