

absolutely short-circuit-proof

minimal size

test certifications to ENEC 10-, VDE, UL- and CSA-regulations

vaccum encapsulated, bobbin with dual chamber windings

temperature class ta 40°C/F and ta 70°C/F

high electrical safety and long service-life properties


individually tested with certificate

excellent temperature fluctuation resistance properties



self-extinguishing cast housing and sealing material



Article no. BV	Output ta 40°C/F	prim.V	Connecting pins	Operating point sec. ± 5%	Connecting pins	No-load voltage V ± 5%
BV EI 304 2046	2,6	230	1-5	2x9 V 145 mA	6-7/9-10	16,2/16,2

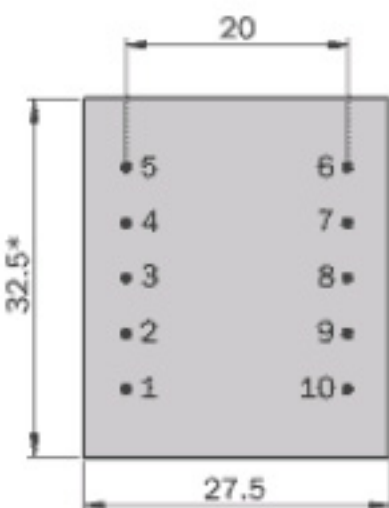

Ansicht auf die Stifte

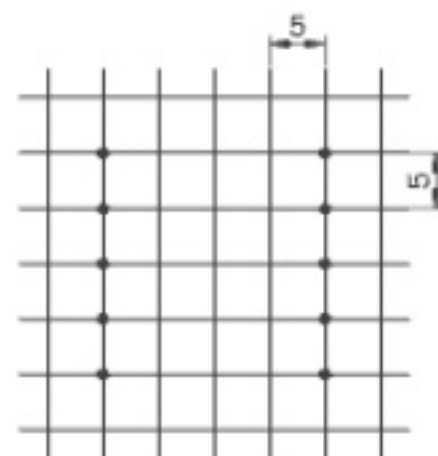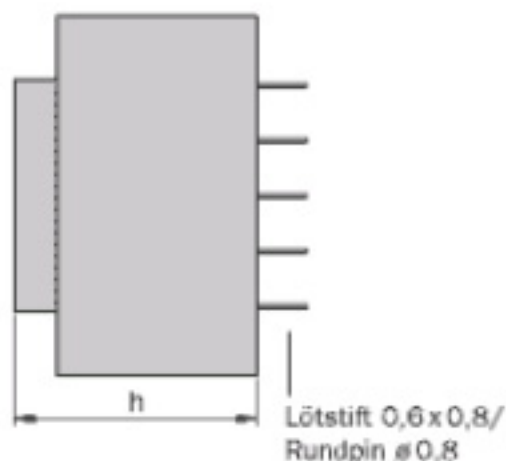

Maße ohne Toleranzangabe ± 0,3 mm,
Ausführungsänderungen vorbehalten