

Nema 14 Stepper Motor


COMMON RATINGS

Step angle :	1.8°	Dielectric strength :	500VAC
Positional accuracy :	±5%	Insulation resistance :	100Mohm(500VDC)
Number of Phase :	2	Ambient Temperature :	-10℃~50℃
Temperature rise :	80℃MAX	Insulation class :	B
Rotor Inertia :	11gcm ²	Weight :	0.12Kg


SPECIFICATIONS

Holding Torque (2 phases on) N.cm	Rated Current/Phase (Amps DC)	Phase Resistance (ohms) ±10%	Rated Voltage/Phase (V DC)	Phase Inductance (mH)±20%(1KHz) Typical
12.5	1.0	3.5	3.5	3.5

DIMENSIONS unit=mm

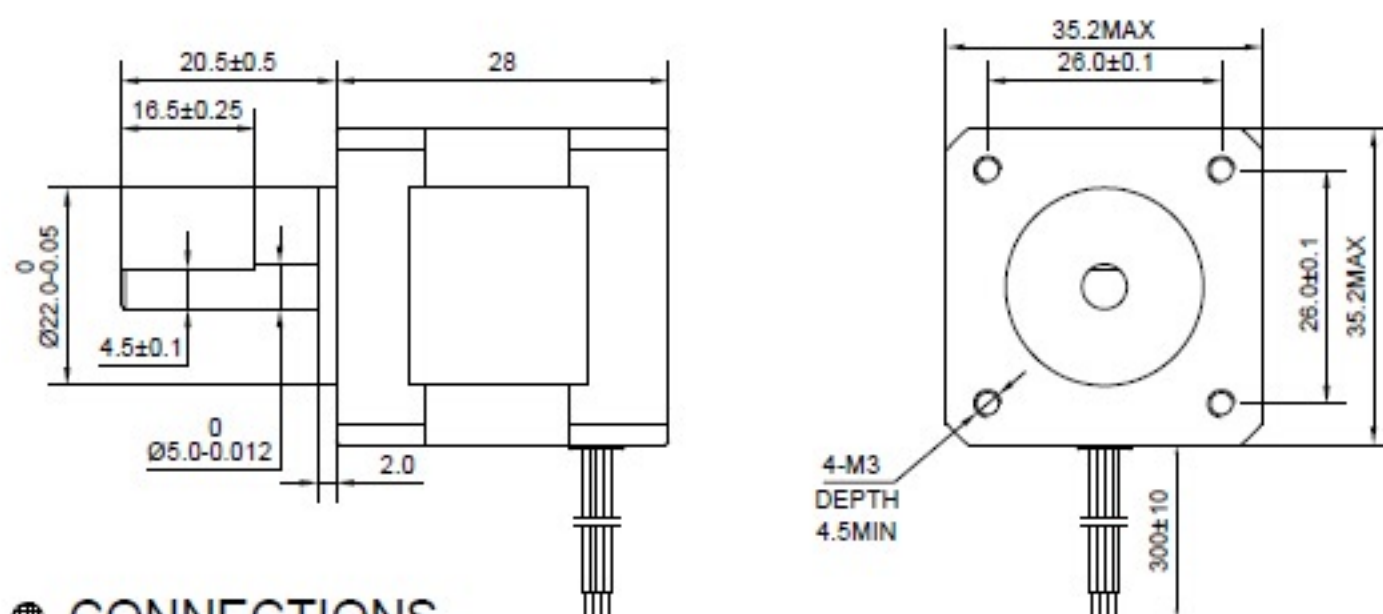

CONNECTIONS

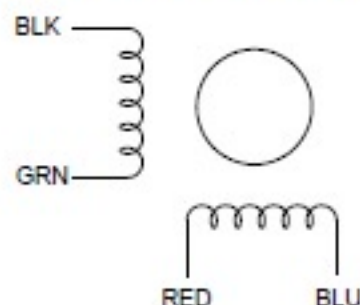

14HS11-1004S