
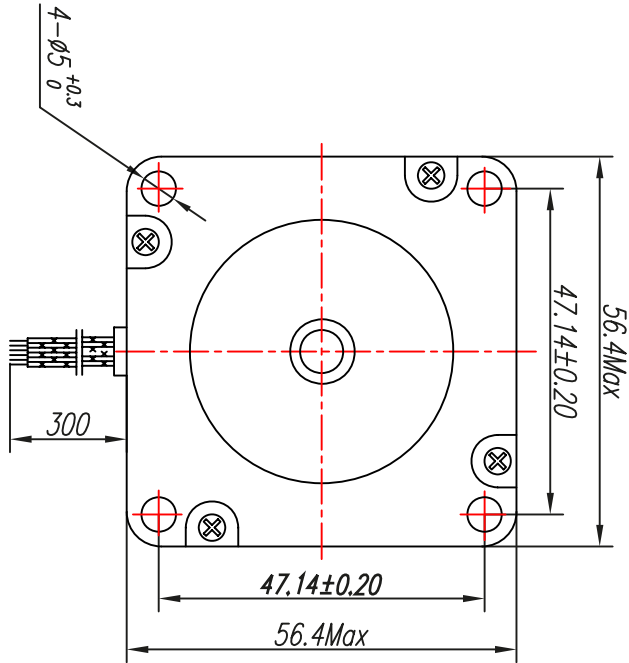



☐ DIMENSIONS unit=mm

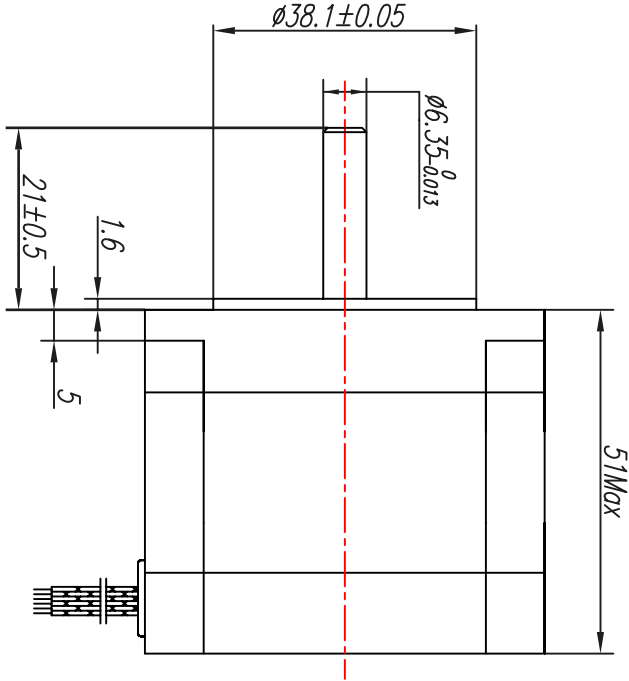

☐ SPECIFICATIONS

PHASE	2	PHASE	COMMENT
STEP ANGLE	1.8±5%	°/STEP	
VOLTAGE	8.06	V	
CURRENT	0.62	A/PHASE	
RESISTANCE	13 ±10%	Ω/PHASE	
INDUCTANCE	28 ±20%	mH/PHASE	
HOLDING TORQUE	90	N.cm Min	
INSULATION CLASS	B		
LEAD STYLE	AWG22 UL1007		

☐ COLORS OF LEAD WIRES BI-POLAR



ITC-CNC-V2

ITC MOTOR

www.itc10.com