

absolutely short-circuit-proof

minimal size

test certifications to ENEC 10-, VDE, UL- and CSA-regulations

vaccum encapsulated, bobbin with dual chamber windings

temperature class ta 40°C/F and ta 70°C/F

hight electrical safety and long service-life properties


individually tested with certificate

excellent temperature fluctuation resistance properties


self-extinguishing cast housing and sealing material




Article no. BV	Output ta 40°C/F	prim.V	Connecting pins	Operating point sec. $\pm 5\%$	Connecting pins	No-load voltage $V \pm 5\%$
BV EI 304 2041	2,6	230	1-5		7-9	

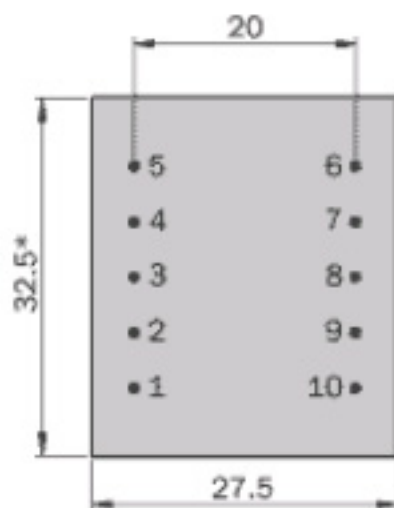

Ansicht auf die Stifte

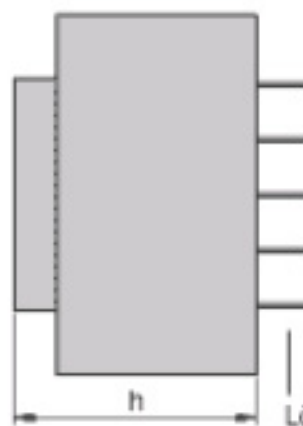

Lötstift 0,6 x 0,8/
Rundpin $\varnothing 0,8$

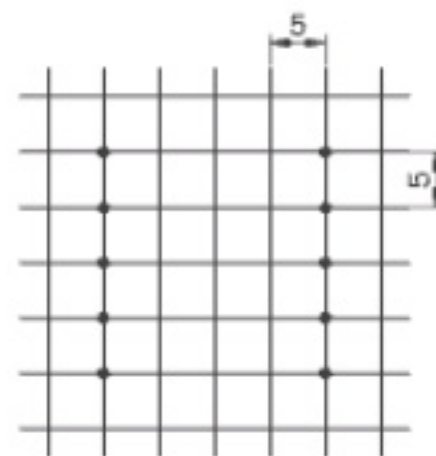

Maße ohne Toleranzangabe $\pm 0,3$ mm,
Ausführungsänderungen vorbehalten