

Model: SCT013-030

Characteristic:

Opening size 13mmx13mm, Compatible to foreign products, leading wire 1 metre, standardΦ3.5 three core plug output, current & voltage two types of output. (Patent No. ZL 2015 3 0060067.X)

Technical indicators:


Hanging installation, leading wire output
Fire resistance property: UL94-V0
Standard: GB1208-2006
Work temperature: -25℃ ~ +70℃
Storage temperature: -30℃ ~ +90℃
Work voltage: 660V
Frequency range: 50Hz-1KHz
Dielectric strength: 3.5KV 50Hz 1min

Electric parameter:


Rated input(rms)	30	A
Max.Input	60	A
Rated output	1	V
Turns ratio		
Accuracy	± 1	%
Linearity	≤ 0.2	%
Phase error		
max: Sampling resistance		Ω
Weight	50	g



Characteristic curve in different load volt-ampere:



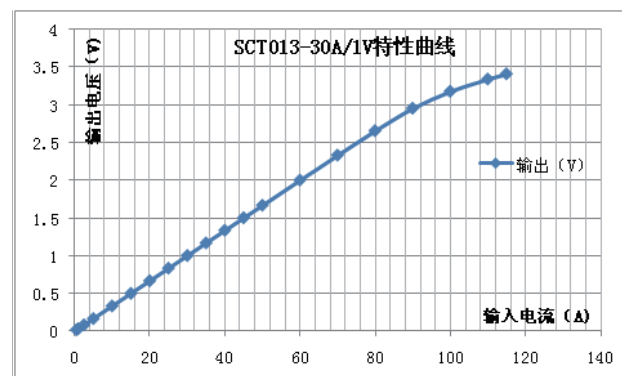


Wiring diagram:

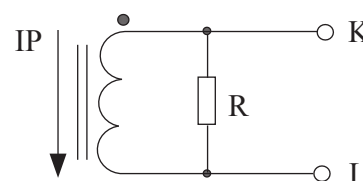

Built-in with sampling resistance
voltage output type

Outline size diagram(in mm):

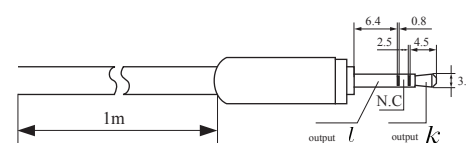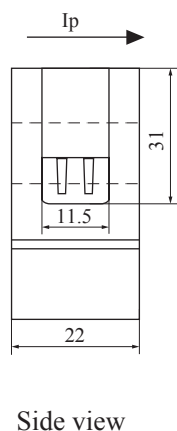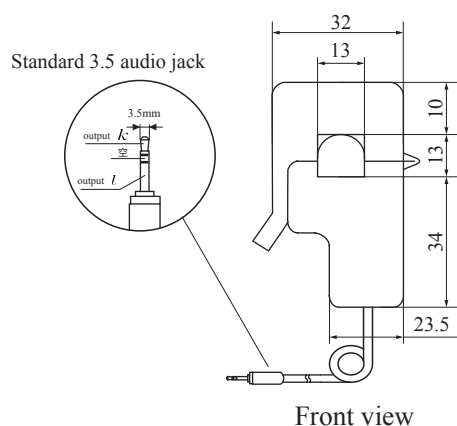

Standard three core jack schematic diagram